

شركة مصادر الجزيرة للتجارة
Masader AL-Jazeera Trading Co


Capital 50000000 رأس المال

Closed Contribution مساهمة مقفلة



800 1240 474

free number

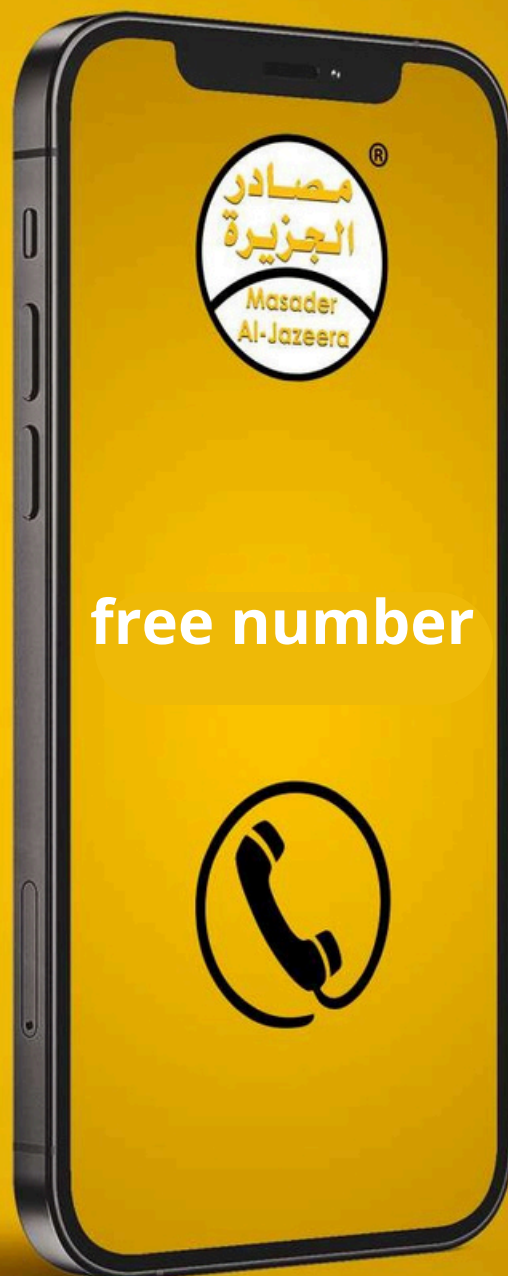

socfdn

شركة مصادر الجزيرة للتجارة Masader AL-Jazeera Trading Co

Capital 50000000 رأس المال

Closed Contribution مساهمة مقفلة



Installation and Issuance of Rear and Side Guard Cards for All Trucks

Electronic and Instant Issuance



Your certificate is delivered via QR code.
.You will also receive a download link by SMS and email



شركة مصادر الجزيرة للتجارة
Masader AL-Jazeera Trading Co

Capital 50000000 رأس المال

Closed Contribution مساهمة مقفلة



Papers are a thing of the past!



In accordance with the 2030 Saudi Vision and the National Transformation Plan, we aim to keep pace with digital transformation in order to achieve the 2030 Saudi Vision.



socfdn

800 1240 474



free number

شركة مصادر الجزيرة للتجارة
Masader AL-Jazeera Trading Co

Capital 50000000 رأس المال Closed Contribution مساهمة مقفلة



Installation and Issuance of Rear and Side Guard Cards for All Trucks



No need to carry your certificate, simply stick a QR code for your safety guards.



socfdn

800 1240 474



free number



شركة مصادر الجزيرة التجارية
Masader Al-Jazeera Trading Co.

رأس المال 50000000 Capital مساهمة مقفلة Closed Contribution

Unique Under-run Device Card
Owner and Manufacturer's Information

Truck/Trailer's Owner:	Projects Supply Co.
Organization Name (Manufacturer):	Masader Al-Jazeera Trading Co.
Manufacturer Assigned Code:	A70
Country of Origin:	Saudi Arabia
Date of Manufacture:	2016
Technical References:	Technical regulations for front, rear and side guards for trucks and trailers

Trailer's/Truck's Information

Truck's/trailer's type:	MKT Trailer Head															
Under-Run Type (Side, Back):	Back															
Truck/Trailer's VIN:	WDB934135L921656															
Distinguished Under-Run Card:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	K	S	A	A	7	0	B	M	K	T	2	2	0	0	0	4
Card's Issue Date:	12:09:26 2022-03-22															

Quality Director

Report Director

Workshop Director



المملكة العربية السعودية - الرياض - الشفا
Kingdom of Saudi Arabia - Riyadh - Al Shafaa
رقم المبنى 3166 | الرمز البريدي 14724 | الرقم الإضافي 6356

00966505732722
0096611284000
info@masader-j.com
https://masader-j.com/

شركة مصادر الجزيرة للتجارة Masader AL-Jazeera Trading Co

Capital 50000000 رأس المال

Closed Contribution مساهمة مقفلة



Installing Safety Guards is Not a Matter of Choice

The Purpose of Safety Guards:



- Safeguarding lives.



- Ensuring the safety of other vehicles on the road.



- Avoiding penalties for non-conformity to Saudi standards.



YouTube Twitter Facebook Instagram Snapchat
socfdn

800 1240 474  free number



Installing Safety Guards is Not a Matter of Choice

socfdn

800 1240 474



الرقم المجاني


مساهمة مقفلة Closed Contribution

رأس المال 50000000 Capital

شركة مصادر الجزيرة للتجارة
Masader AL-Jazeera Trading Co



Safety Guards for Trucks and Trailers

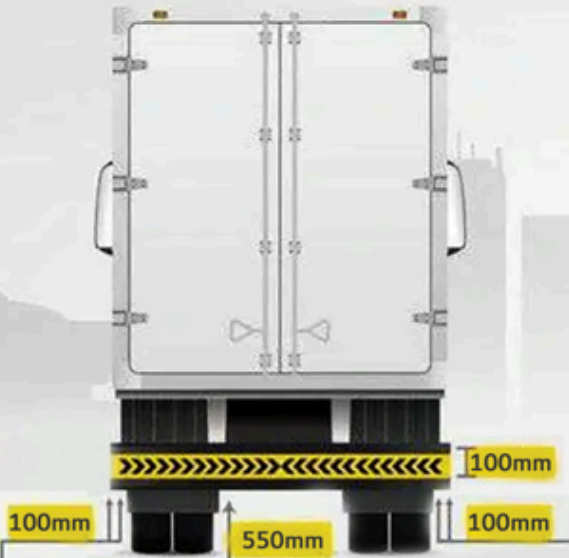

Rear Safety Guards

- The cross-sectional height of the rear safety guard must be at least 100 mm.
- The width of the rear guardrail must not be less than the width of the rear axle by 100 mm on both sides.
- The distance from the lower edge of the safety guard to the ground must not exceed 550 mm before the vehicle is loaded.




Front Safety Guards

- The Authority has stipulated that the cross-sectional height of the front safety guard must not be less than 100 mm for vehicles with a maximum weight between 3.5 and 12 tons, and 120 mm for vehicles with a maximum weight exceeding 12 tons.
- Do not bend the sides towards the front.
- The distance from the lower edge of the front safety guard to the ground must not exceed 400 mm.

Side Safety Guards

The cross-sectional height of the guardrails must be at least 50 mm for vehicles with a maximum weight of less than 12 tons and trailers with a maximum weight of less than 10 tons. The cross-sectional height of the guardrails must be at least 100 mm for vehicles with a maximum weight of more than 12 tons and trailers with a maximum weight of more than 10 tons.

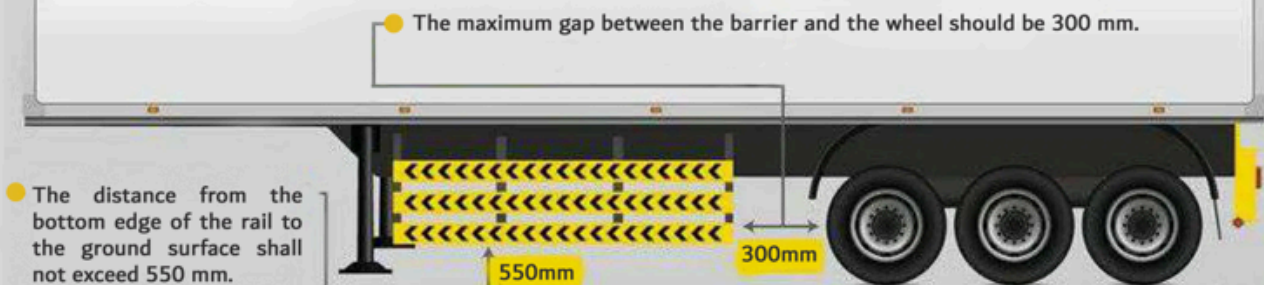

- The distance from the bottom edge of the rail to the ground surface shall not exceed 550 mm.

Technical regulations to prevent road accidents involving cars sliding underneath trucks

Rear Safety Guards



- The cross-sectional height of the front safety guard must not be less than 100 mm, and 120 mm for vehicles exceeding 12 tons.
- The distance from the lower edge of the safety guard to the ground must not exceed 450 mm before when vehicle is loaded.

Front Safety Guards



- The cross-sectional height of the front safety guard must not be less than 100 mm, and 120 mm for vehicles exceeding 12 tons.
- The front safety guard shall not have sharp edges.
- The distance from the lower edge of the front safety guard to the ground must not exceed 400 mm.

Side Safety Guards



The maximum gap between the safety guard and the wheel is 300mm.

The distance between the safety guards shall not exceed 300mm.

The distance from the lower edge of the safety guard to the ground shall not exceed 450mm.

شركة مصادر الجزيرة للتجارة Masader AL-Jazeera Trading Co

Capital 50000000 رأس المال

Closed Contribution مساهمة مقفلة



Safety Guards for Trucks and Trailers are Now Available



Side and Rear Safety Guards / Trucks / Trailers / Aluminum Tanks / Flatbed Trailers / Trailer Heads

شركة مصادر الجزيرة للتجارة Masader AL-Jazeera Trading Co

Capital 50000000 رأس المال

Closed Contribution مساهمة مقفلة

